

AGIPROTM

••• SMALL-SIZED TOP-ENTRY AGITATOR

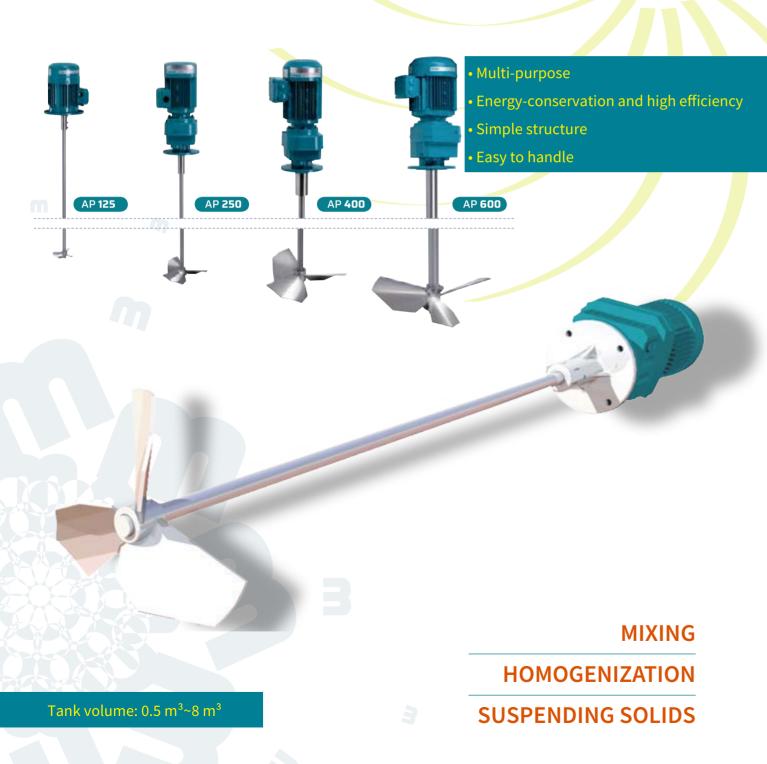

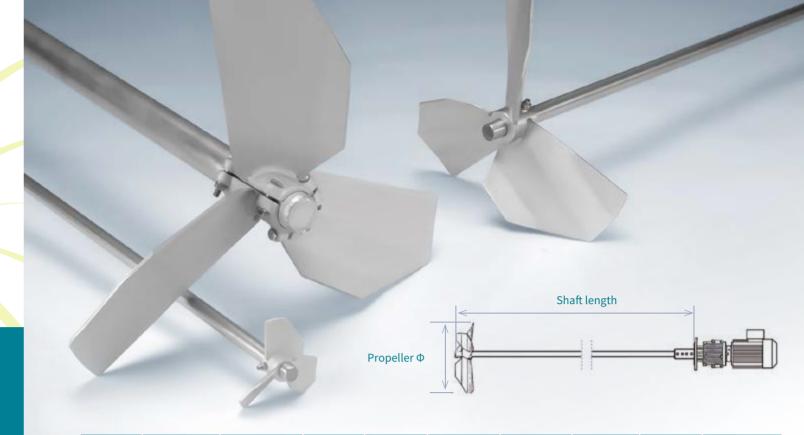

Туре	Tank volume m³	Propeller Ø mm	Rotation speed rpm	Flow velocity m/s	Pumping flow m³/h	Installed power kW	Shaft length mm	Weight kg	Square flange mm
AP125	0.5 to 1.5	125	1425	3.57	158	0.75	1200	15	
AP250	1.5 to 3	250	280	1.48	261	0.37	1500	20	250 x 250
AP400	3 to 5	400	145	1.33	600	0.55	1500	30	
AP600	5 to 8	600	123	1.17	1196	1.1	2000	60	400 x 400

Voltage 380V three-phase - 50 Hz - protection degree IP55

