

BOTTOMJETTM

●●● BOTTOM-ENTRY AGITATOR WITH MECHANICAL SEAL


- Satisfy a variety of mixing requirement
- Optional full tank maintenance system
- Optional CIP cleaning satisfied
- Comply with relevant explosion-proof standards

Power : Reaches 200kW

Specification: JET bottom-entry installation

Seal: Mechanical seal

**Operation conditions: Normal temp to 150°C
Vacuum to 16bar**

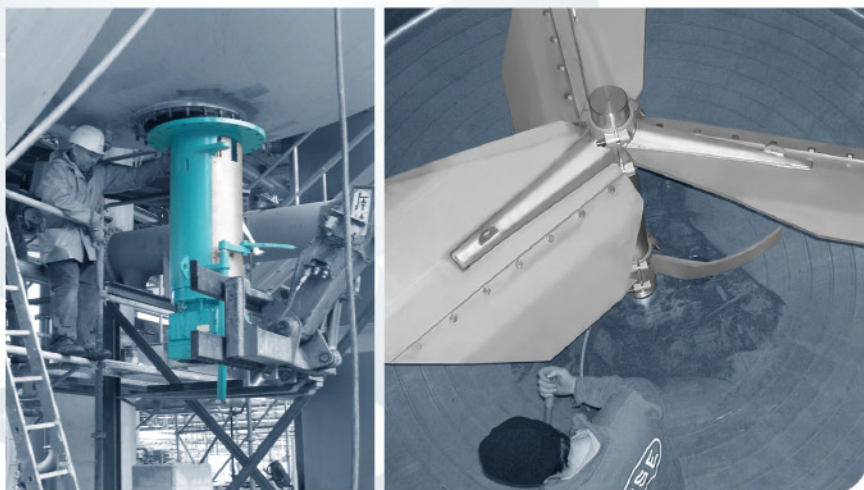

Applications: Petrochemical industry