


AGIPRO™

●●●● SMALL-SIZED TOP-ENTRY AGITATOR




- Wide Range of Applications
- Energy-conservation and high efficiency
- Simple structure
- Easy Operation

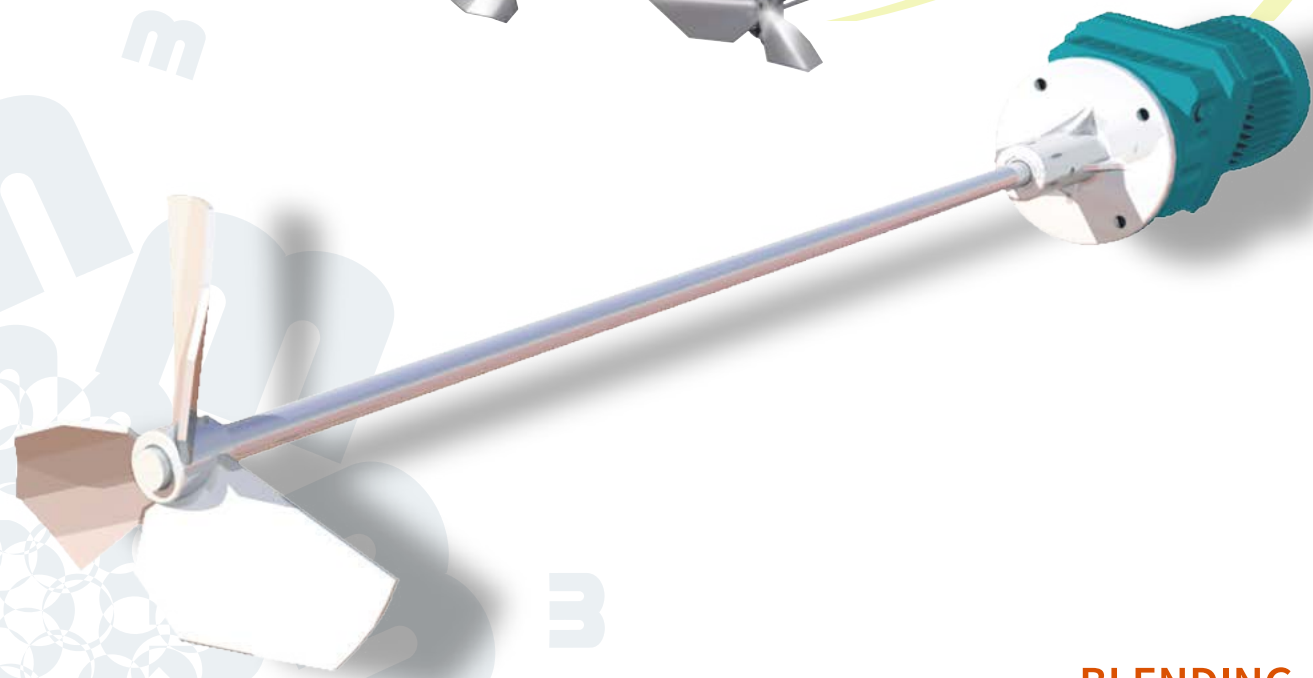

Mixing volume: 0.5 m³~8 m³

BLENDING
HOMOGENIZATION
SUSPENDING SOLIDS

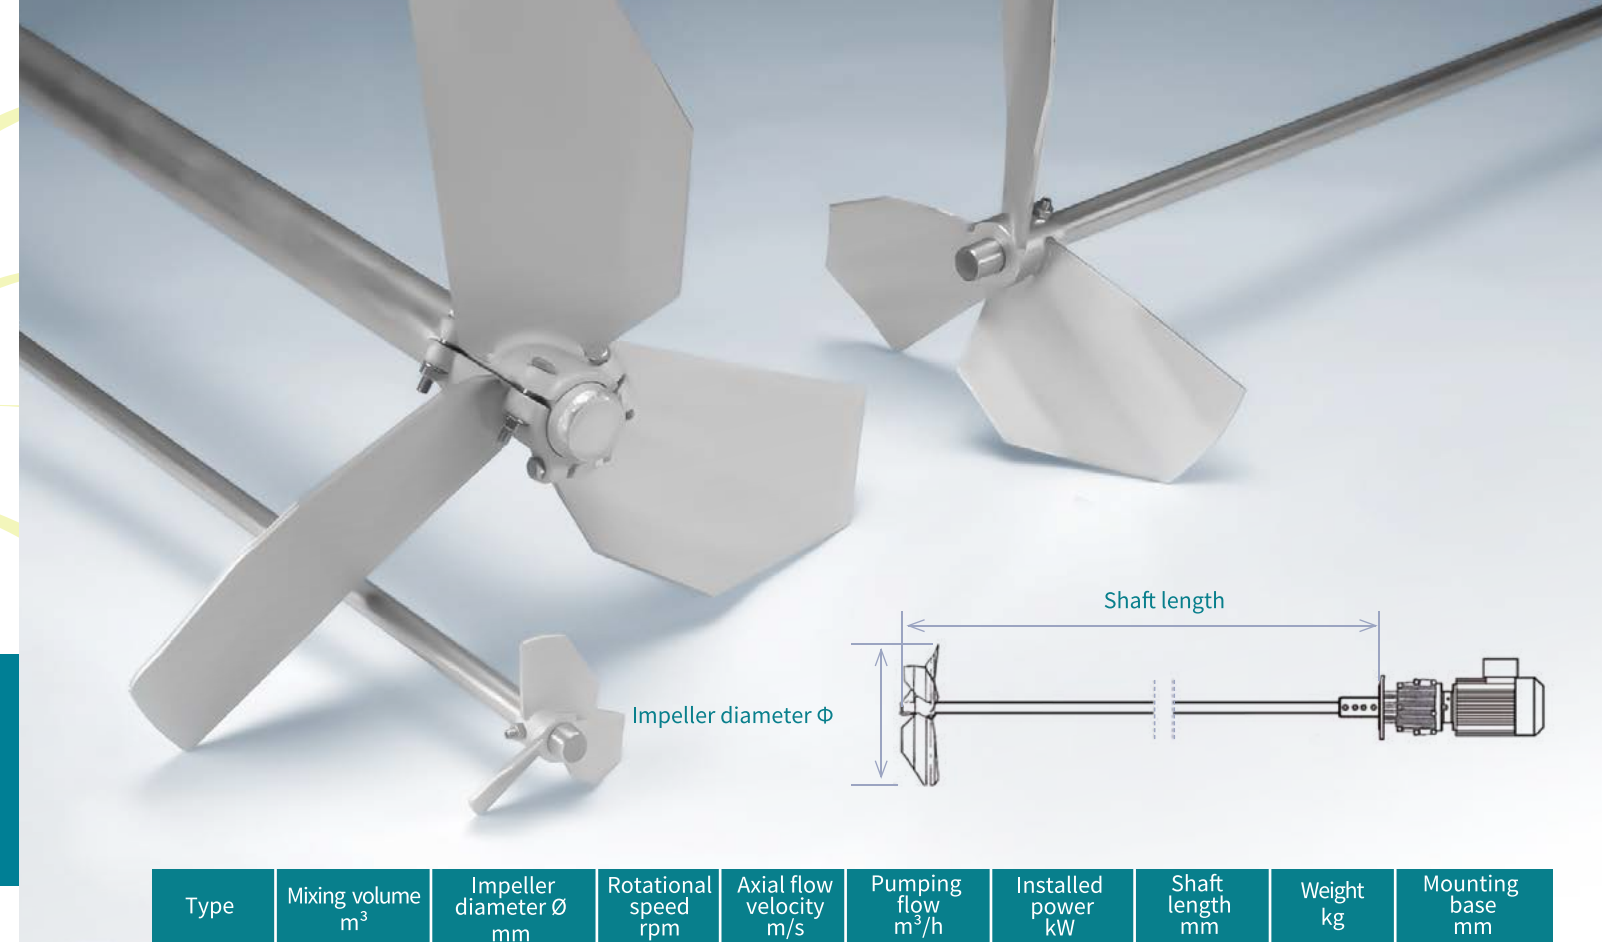

Type	Mixing volume m ³	Impeller diameter Ø mm	Rotational speed rpm	Axial flow velocity m/s	Pumping flow m ³ /h	Installed power kW	Shaft length mm	Weight kg	Mounting base mm
AP125	0.5 to 1.5	125	1425	3.57	158	0.75	1200	15	250 x 250
AP250	1.5 to 3	250	280	1.48	261	0.37	1500	20	
AP400	3 to 5	400	145	1.33	600	0.55	1500	30	400 x 400
AP600	5 to 8	600	123	1.17	1196	1.1	2000	60	

Voltage 380V three-phase - 50 Hz - protection IP55

